





110kV 防风偏复合绝缘子 110 kV Wind Deflection Composite Insulator

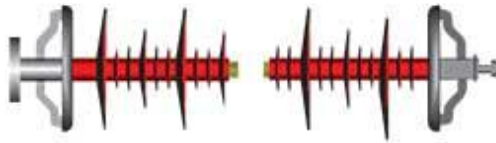


110kV 防风偏复合绝缘子示意图 (N-T型)
110 kV Wind Deflection Composite Insulator Diagram (N-T Type)



110kV 防风偏复合绝缘子示意图 (P-T型)
110 kV Wind Deflection Composite Insulator Diagram (P-T Type)



110kV 防风偏复合绝缘子示意图 (S-D型)
110 kV Wind Deflection Composite Insulator Diagram (S-D Type)



110kV 防风偏复合绝缘子示意图 (S-Q型)
110 kV Wind Deflection Composite Insulator Diagram (S-Q Type)

110kV 防风偏复合绝缘子主要尺寸与特性

Main Dimensions and Characteristics of 110kV Wind Deflection Composite Insulator

序号 Serial Number	绝缘子型号 Type of Insulator	额定电压 Specified Voltage	额定机械负荷 Specified Mechanical Tensile load	额定弯曲负荷 Specified Bending Tensile load	连接结构型式 Connection Structure Mark	总长度 Section Length	最小爬电距离 Min. Arcing Distance	大伞直径 Big shed Diameter	防污闪直径 Diameter of Grading Ring	最小公称爬电距离 Min Nominal Creepage Distance	断线时额定弯曲负荷 Deflection Under Bending Load	雷电冲击耐受电压 (有效值) Lightning Impulse Withstand Voltage (Peak Value)	工频耐受电压 (有效值) Power Frequency Withstand Voltage (R.M.S)	参考重量 Reference Weight
		kV	kN	kN		H mm	h mm	d1 mm	D mm	L mm	< mm	> kV	> kV	kg
1	FYTX-110/100-04-NT	110	100	0.4	16	1386±15	1100	190	250	3080	200	550	230	10
2	FYTX-110/100-04-DT	110	100	0.4	16	1386±15	1100	190	250	3080	200	550	230	10
3	FYTX-110/100-04-SD	110	100	0.4		1413±15	1100	190	250	3080	200	550	230	10
4	FYTX-110/100-04-SQ	110	100	0.4		1400±15	1100	190	250	3080	200	550	230	10

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.