


110kV(126kV) 空心复合绝缘子 110kV(126kV) Composite Hollow Insulator

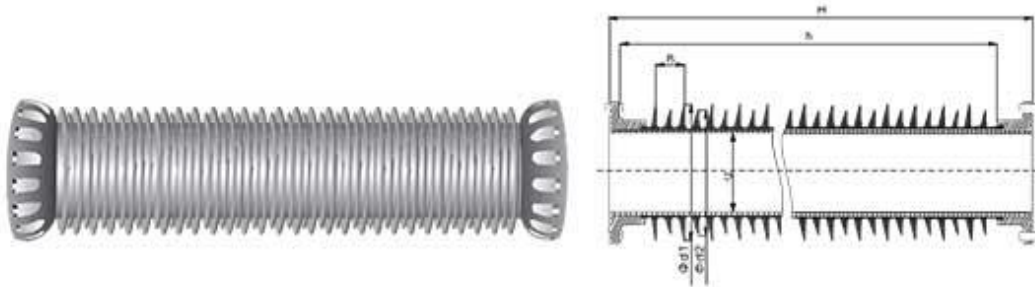

110kV(126kV) 空心复合绝缘子示意图  
110kV(126kV) Composite Hollow Insulator Diagram

110kV(126kV) 空心复合绝缘子主要尺寸与特性

Main Dimension and Characteristics of 110kV(126kV) Composite Hollow Insulator

Serial Number 序号	Type of Insulator 绝缘子型式	Specified Voltage 额定电压	Specified Bending Moment Load 额定弯矩荷载	Section Length 绝缘子长度	Min. Arcing Distance 最小爬电距离	Tube Inner Diameter 管子内径	Big Shed Diameter 大伞直径	Min Nominal Creepage Distance 最小公称爬电距离	Lightning Impulse Withstand Voltage(Peak Value) 雷电冲击耐受电压(峰值)	Power Frequency Withstand Voltage Min. Wert(RMS) 工频耐受电压(有效值)	Reference Weight 参考重量
		kV	kN	H mm	h mm	D mm	d1 mm	L mm	$U_{50}$ kV	$U_{10}$ kV	kg
1	FK-110(126)(8/12.5)	110/126	8/12.5	1360	>1070	115	284	4370	550	245	50

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.