


110kV(132kV) 横担复合绝缘子 110kV(132kV) Crossarm Composite Insulator

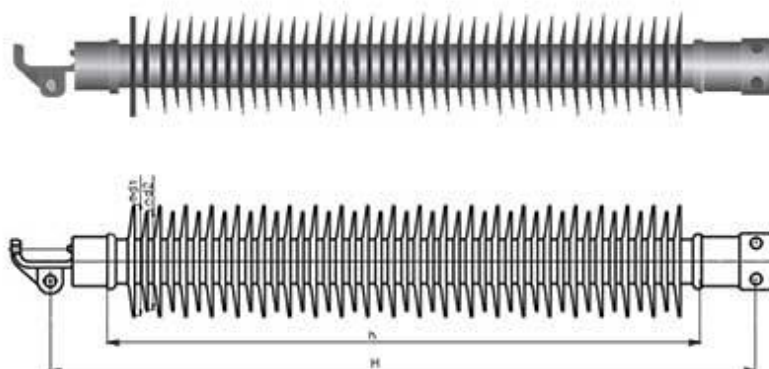

110kV(132kV) 横担复合绝缘子示意图  
110kV(132kV) Cross arm Composite Insulator Diagram

110kV(132kV) 横担复合绝缘子主要尺寸与特性

Main Dimensions and Characteristics of 110kV(132kV) Cross arm Composite Insulator

Serial Number 序号	Type of Insulator 绝缘子型号	Specified Voltage 额定电压	Specific Bending Withstand Value (Peak Value) 额定弯矩峰值	Section Length 绝缘子长度	Min. Arcing Distance 最小电弧距离	Min Nominal Creepage Distance 最小公称爬电距离	Pin Shed Diameter 伞针直径	Lighting Impulse Withstand Voltage (Peak value) 雷电冲击电压耐受峰值 (峰值)	Power Frequency Withstand Voltage Min./V <sub>1</sub> (RMS) H <sub>1</sub> 工频耐受电压 (有效值)	Reference Weight: 参考重量
		kV	kN	H mm	h mm	L mm	d1 mm	V <sub>1</sub> kV	V <sub>2</sub> kV	kg
1	FS-110(132)(8/10/12.5)	110/132	8/10/12.5	1386	921	4500	218	550	344	230

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.