


12kV 防雷针式复合绝缘子 12kV Pin Type Lightning Protection of Composite Insulator

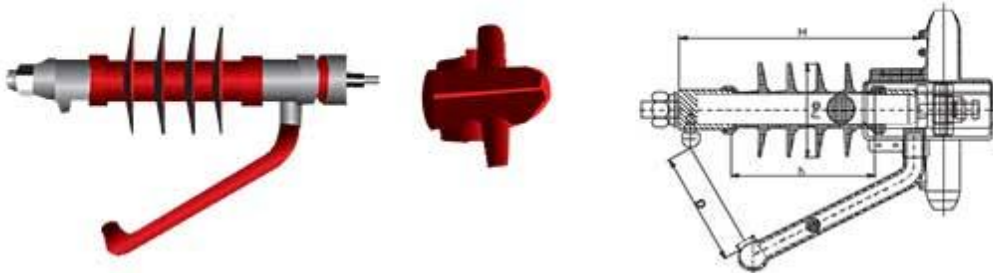

12kV 防雷针式复合绝缘子示意图  
12kV Pin Type Lightning Protection of Composite Insulator Diagram

12kV 防雷针式复合绝缘子主要尺寸与特性  
Main Dimensions and Characteristics of 12 kV Pin Type Lightning Protection Composite Insulator

序号 Serial Number	绝缘子类型 Type of Insulator	额定电压 Specified Voltage	雷电冲击耐受电压 Specified lightning withstand voltage	伞裙长度 Section Length		最小伞裙距离 Min. Arcing Distance	最大伞裙直径 Big Shed Diameter	最小公称爬电距离 Min Nominal Creepage Distance	放电间隙 Discharge Gap	雷电冲击耐受电压(峰值电压) 雷电冲击耐受电压(峰值) Lightning impulse withstand voltage(peak value)	电压 Voltage	参考重量 Reference Weight
		kV	kN	H mm	h mm	d1 mm	L mm	L mm	D mm	≥ kV	≥ kV	kg
1	PPEG-125	12	5	265	150	98	400	> 100		75	42	1

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产  
Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.