


20kV 针式复合绝缘子 20kV Pin Type Composite Insulator

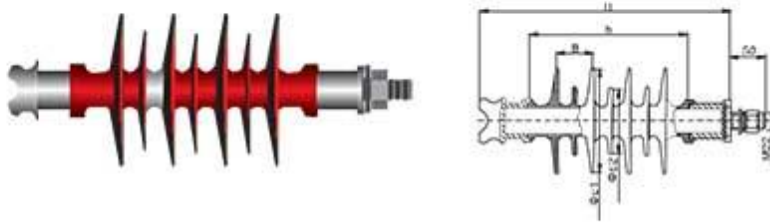

20kV 针式复合绝缘子示意图
20kV Pin Type Composite Insulator Diagram

20kV 针式复合绝缘子主要尺寸与特性

Main Dimensions and Characteristics of 20kV Pin Type Composite Insulator

序号 Serial Number	绝缘子型号 Type of Insulator	额定电压 Specified Voltage	额定负荷 Specified Loading	伞裙长度 Section Length	最小爬电距离 Min. Arcing Distance	伞裙直径 Big Shed Diameter	最小公称爬电距离 Min Nominal Creepage Distance	钢脚规格 Steel Foot Specification	雷电冲击耐受电压 (峰值) Lightning Impulse Withstand Voltage(peak value)	工频耐受电压 (有效值) Power Frequency Withstand Voltage Min. (Wol/RMS)	参考重量 Reference Weight
		kV	kN	H mm	h mm	d1 mm	L mm		> kV	> kV	kg
1	FP-206	20	11	327±5	205	131	490	M20	125	60	3
2	FP-2012	20	12	430±5	300	146	650	M22	150	60	3.5

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.