


220kV 棒形悬式复合绝缘子 220kV Composite Long Rod Suspension Type Insulator

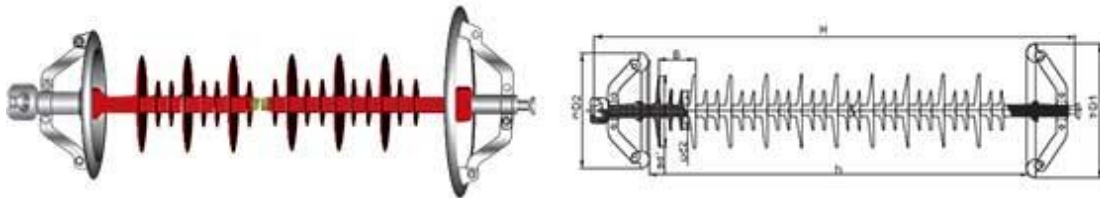

220kV 棒形悬式复合绝缘子示意图  
220kV Composite Long Rod Suspension Type Insulator Schematic Diagram

220kV 棒形悬式复合绝缘子主要尺寸与特性

Main Dimensions and Characteristics of 220kV Composite Long Rod Suspension Type Insulator

序号 Serial Number	绝缘子型号 Type of Insulator	额定电压 Specified Voltage	额定机械负荷 Specified Mechanical Tensile Load	连接结构型式 Connection Structure Mark	绝缘长度 Section Length	最小爬电距离 Min. Arcing Distance	棒形直径 Rod Diameter	均压环直径 Diameter of Grading Ring	绝缘子长度 Min. Nominal Creepage Distance	雷电冲击耐受电压 Lightning Impulse Withstand Voltage (Peak Value)	工频耐受电压 Power Frequency Withstand Voltage (Min. Wet (MMS))	参考重量 Reference Weight
		kV	kN		H mm	h mm	d1 mm	D1/D2 mm	L mm	≥ kV	≥ kV	kg
1	FXBW-220(230)/(120/100/70)	220/230	120/100/70	16	2240 ± 30	1900	162/122	305/250	6800	1000	395	12
2	FXBW-220(230)' (240/210/160/160)	220/230	240/210/160/ 160	20	2350 ± 30	1900	171	305/250	6800	1000	395	13
3	FXBW-220(230)/300	220/230	300	24	2240 ± 30	1900	171	305/250	6800	1000	395	14

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.