


220kV 横担复合绝缘子 220kV Cross arm Composite Insulator

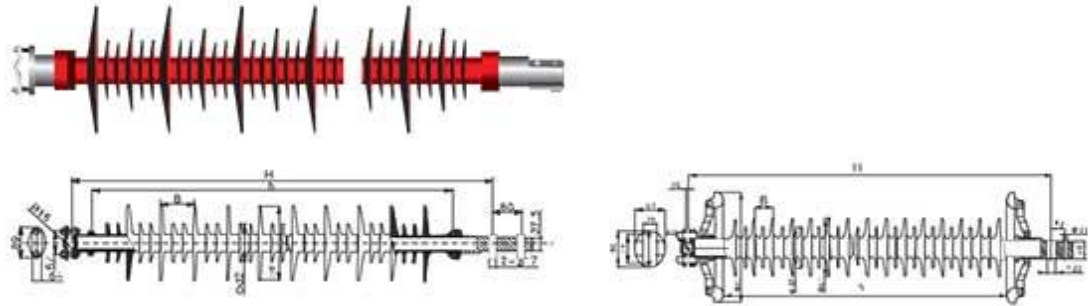

220kV 横担复合绝缘子示意图  
220kV Cross arm Composite Insulator Diagram

220kV 横担复合绝缘子主要尺寸与特性

Main Dimensions and Characteristics of 220kV Cross arm Composite Insulator

序号 Serial Number	绝缘子类型 Type of Insulator	额定电压 Specified Voltage	额定机械负荷 Specified Mechanical Tensile Force	绝缘长度 Section Length	最小爬电距离 Min. Arcing Distance	大伞直径 Big Shed Diameter	均压环直径 Diameter of Grading Ring	最小公称爬电距离 Min Nominal Creepage Distance	雷电冲击耐受电压 (峰值有效值) Lightning Impulse Withstand Voltage(peak value)	工频耐受电压 (有效值) Power Frequency Withstand Voltage min. w.eff(RMS)	参考重量 Reference Weight
		kV	kN	H mm	h mm	d1 mm	D mm	L mm	W kV	W kV	kg
1	FS-220/0.25-MJ-2240	220	0.25	2240 ± 30	2100	190	305	6300	1000	395	18
2	FS-220/0.5-MJ-2240	220	0.5	2240 ± 30	2100	250	305	6300	1000	395	21
3	FS-220 1-MJ-2500	220	1	2500 ± 30	2300	157	305	6300	1000	395	22
4	FS-220 2-MJ-2500	220	2	2500 ± 30	2300	172	305	6300	1000	395	32
5	FS-220 4-MJ-2500	220	4	2500 ± 30	2300	192	305	6300	1000	395	48

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.