


220kV(252kV) 支柱复合绝缘子 220kV (252 kV) Post Composite Insulator

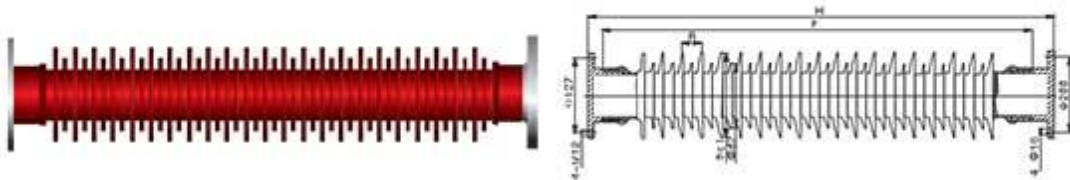

220kV(252kV) 支柱复合绝缘子示意图
220kV(252 kV) Post Composite Insulator Diagram

220kV(252kV) 支柱复合绝缘子主要尺寸与特性

Main Dimensions and Characteristics of 220kV (252kV) Post Composite Insulator

序号 Serial Number	绝缘子型号 Type of Insulator	额定电压 Specified Voltage	额定短路电流 Specified Breaking Withstand Current (kA)	绝缘子长度 Section Length	最小电弧距离 Min. Arcing Distance	大伞直径 Big Shed Diameter	最小爬电距离 Min. Normal Creepage Distance	雷电冲击耐受电压(峰值) Lightning Impulse Withstand Voltage (Peak Value)	工频耐受电压(有效值) Power Frequency Withstand Voltage (RMS)	参考重量 Reference Weight
		kV	kA	H mm	h mm	d1 mm	L mm	≥ kV	≥ kV	kg
1	FZSW-220(252)/4	220	4	2300 ± 5	2132	210	6300	1050	460	48

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.