


33kV (36kV、40.5kV) 支柱复合绝缘子 33kV (36kV、40.5kV) Post Composite Insulator

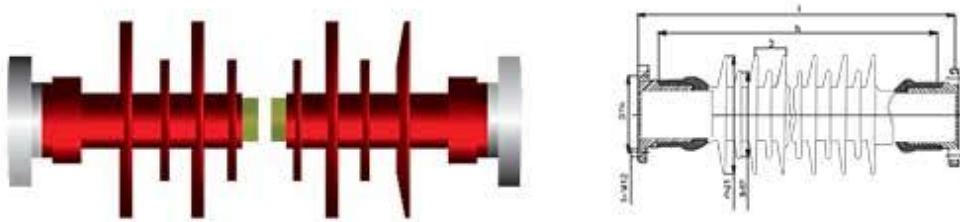

33kV(36kV、40.5kV) 支柱复合绝缘子示意图
33kV(36kV、40.5kV) Post Composite Insulator Diagram

33kV(36kV、40.5kV) 支柱复合绝缘子主要尺寸与特性

Main Dimension and Characteristics of 33kV(36kV、40.5kV) Post Composite Insulator

序号 Serial Number	绝缘子型号 Type of Insulator	额定电压 Specified Voltage	额定负荷 Specified Loading	绝缘长度 Section Length	最小爬电距离 Min. Arcing Distance	大伞直径 Big Shed Diameter	最小公称爬电距离 Min Nominal Creepage Distance	雷电冲击耐受电压(峰值) Lighting Impulse Withstand Voltage(Peak Value)	工频耐受电压(RMS) 工频耐受电压(有效值) Power Frequency Withstand Voltage Min. Value(RMS)	参考重量 Reference Weight
		kV	kN	H mm	h mm	d1 mm	L mm	U kV	U kV	kg
1	FZSW-36 (40.5) /6	36/40.5	8	535 ± 5	445	150	1440	250	95	5.2
2	FZSW-33/6	33	6	355 ± 5	295	113	1020	175	74	2.9

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.