


35kV 针式复合绝缘子 35kV Pin Type Composite Insulator

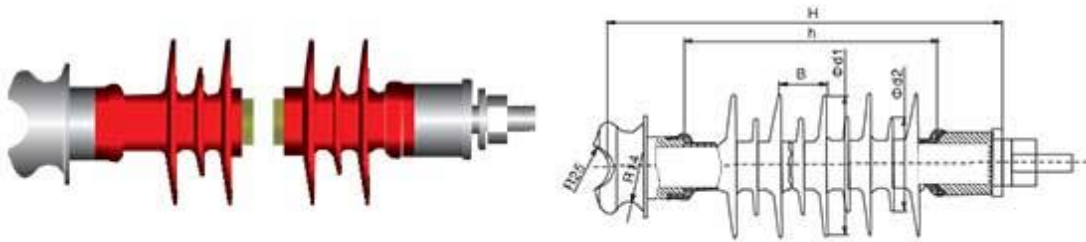

35kV 针式复合绝缘子示意图
35kV Pin Type Composite Insulator Diagram

35kV 针式复合绝缘子主要尺寸与特性

Main Dimensions and Characteristics of 35kV Pin Type Composite Insulator

Serial Number 序号	Type of Insulator 绝缘子型号	Specified Voltage 额定电压	Spot extension withstand Volt 污闪耐受电压(kV)	Section Length 伞高	Min. Arcing Distance 最小爬电距离	Big shed Diameter 大伞直径	Min Nominal Creepage Distance 最小公称爬电距离	Shed Specification 伞裙规格	Lightning impulse Withstand Voltage(peak value) 雷电冲击耐受电压(峰值)	Power Frequency Withstand Voltage Min. Weir(RMS) 工频耐受电压(有效值)	Reference Weight 参考重量
		kV	kN	H mm	h mm	d1 mm	L mm		≧ kV	≧ kV	kg
1	FP-35(33)(8/10/12)	35(33)	8 10 12	560 ± 5	462	145	1440	M20/M22/M24	230	95	6.1
2	FP-35(33)(10/12.5)	35(33)	10/12.5	665 ± 5	485	158	1800	M20/M22/M24	230	95	8.4

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按客户要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.