



36kV、66kV 空心复合绝缘子 36kV、66kV Composite Hollow Insulator



66kV 空心复合绝缘子示意图
 66kV Composite Hollow Insulator Diagram

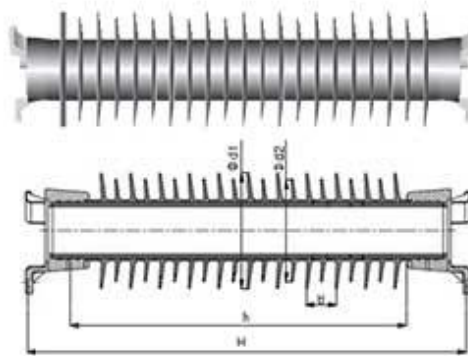

36kV 空心复合绝缘子示意图
 36kV Composite Hollow Insulator Diagram

36kV、66kV 空心复合绝缘子主要尺寸与特性

Main Dimension and Characteristics of 36kV、66kV Composite Hollow Insulator

序号 Serial Number	绝缘子型号 Type of Insulator	额定电压 Specified Voltage	额定负荷 Specified Withstand Load	绝缘长度 Section Length	最小爬电距离 Min. Arcing Distance	管径 Tube Inner Diameter	伞裙直径 Big Shed Diameter	最小公称爬电距离 Min Nominal Creepage Distance	雷电冲击耐受电压(峰值) Lightning Impulse Withstand Voltage(Peak Value)	工频耐受电压(有效值) Power Frequency Withstand Voltage Min. Value(RMS)	参考重量 Reference Weight
		kV	kN	H mm	h mm	D mm	d1 mm	L mm	Δ kV	Δ kV	kg
1	FK-36(1/35)	36	1(3/5)	210	>190	115	204	720	110	46	2.8
2	FK-66/10	66	10	984	≥704	115	264	2900	325	140	18

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.