


66kV 横担复合绝缘子 66kV Cross arm Composite Insulator

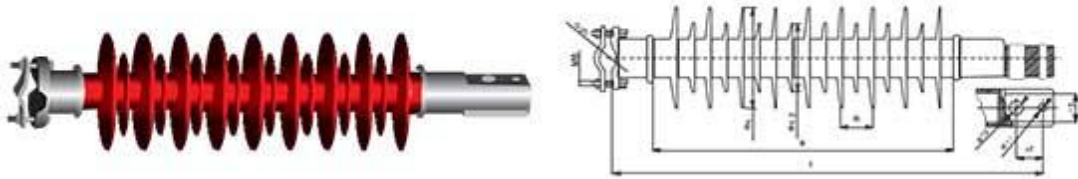

66kV 横担复合绝缘子示意图
66kV Cross arm Composite Insulator Diagram

66kV 横担复合绝缘子主要尺寸与特性
Main Dimensions and Characteristics of 66kV Cross arm Composite Insulator

Serial Number 序号	Type of Insulator 绝缘子型号	Specified Voltage 额定电压	Specified Mechanical Tensile Load 额定机械负荷	Section Length 绝缘长度	Min. Arcing Distance 最小爬电距离	Big Shed Diameter 大伞直径	Min Nominal Creepage Distance 最小公称爬电距离	Lighting (impulse withstand Voltage/peak value) 雷电冲击耐受电压(峰值)	Power Frequency Withstand Voltage Min. Wd/(RMS) 工频耐受电压(有效值)	Reference Weight 参考重量
		kV	kN	H mm	h mm	d1 mm	L mm	≥ kV	≥ kV	kg
1	FS-66/10-MJ	66	10	800 ± 15	660	172	2100	380	145	13

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产
Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.