


69kV(66kV、63kV) 棒形悬式复合绝缘子 69kV(66kV、63kV) Composite Long Rod Suspension Type Insulator

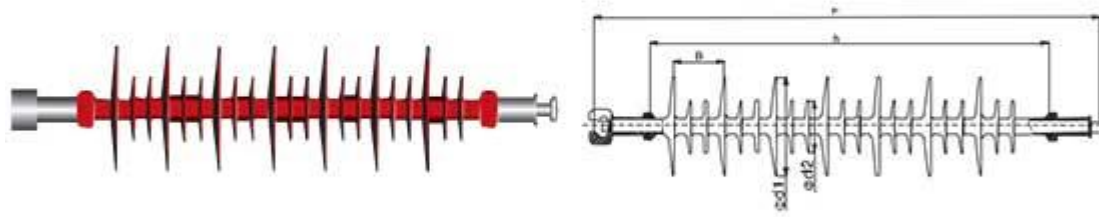

69kV(66kV、63kV) 棒形悬式复合绝缘子示意图
69kV(66kV、63kV) Composite Long Rod Suspension Type Insulator Schematic Diagram

69kV(66kV、63kV) 棒形悬式复合绝缘子主要尺寸与特性
Main Dimensions and Characteristics of 69kV(66kV、63kV) Composite Long Rod Suspension Type Insulator

Serial Number 序号	Type of Insulator 绝缘子型号	Specified Voltage 额定电压	Specified Mechanical Tensile load 额定机械负荷	Connection Structure Mark 绝缘子连接型式	Section Length 绝缘子长度	Min. Arcing Distance 最小爬电距离	Big shed Diameter 大伞直径	Min Nominal Creepage Distance 最小公称爬电距离	Lighting Impulse Withstand Voltage(peak Value) 雷电冲击耐受电压(峰值)	Power Frequency Withstand Voltage Min./Vol(FMS) 工频(交流)耐受电压(有效值)	Preference Weight 参考重量
		kV	kN		H mm	h mm	d1 mm	L mm	≧ kV	≧ kV	kg
1	FXBW-63/ (120/100/70)	63	120/100/70	16	840±20	643	177	1900	350	140	3.8
2	FXBW-69(66)/ (120/100/70)	66/69	120/100/70	16	940±15	700	177	2800	410	180	4.0

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按客户具体要求设计、生产
Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.