


## 盘形悬式硬质复合绝缘子 Disc Suspension Hard Composite Insulator

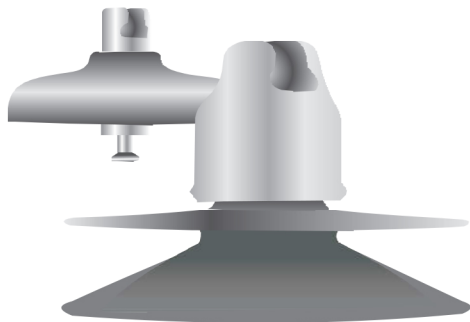

### 盘形悬式硬质复合绝缘子主要尺寸与特性

#### Main Dimension and Characteristics of Disc Suspension Hard Composite Insulator

序号 Serial Number	产品型号 Product Type	额定机械负荷 额定机械拉伸破坏负荷 Specified Mechanical Tensile Failing Load	结构高度 Section Length	最小公称爬电距离 Min nominal Creepage Distance	雷电全波冲击耐受电压 (峰值电压) Lightning Impulse Withstand Voltage (Peak Value)	工频干耐受电压 Power Frequency Withstand Voltage Test-Dry	工频湿耐受电压 Power Frequency Withstand Voltage Test-Wet
		kN	H mm	L mm	kV	kV	kV
1	CS120S16BB16-100/450	120	146±4.6	450	100	80	64
2	CS180S20BB20-100/450	180	170±4.6	450	100	80	64
3	FXWP-70	70	146±4.6	400	100	60	30
2	FXWP-120	120	155±4.6	400	100	60	30
3	FXWP-160	120	155±4.6	400	100	60	30

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.