


69kV(66kV、63kV) 棒形悬式复合绝缘子 69kV(66kV、63kV) Composite Long Rod Suspension Type Insulator

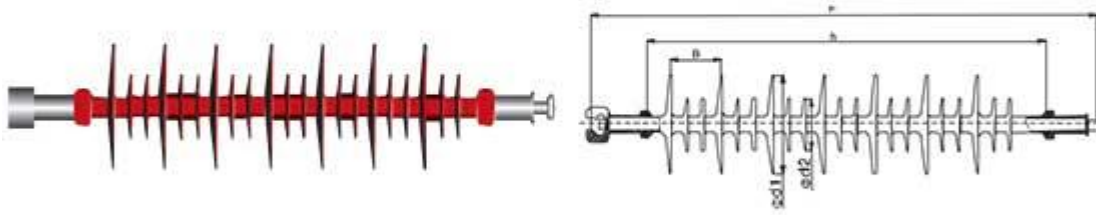


69kV(66kV、63kV) 棒形悬式复合绝缘子示意图  
69kV(66kV、63kV) Composite Long Rod Suspension Type Insulator Schematic Diagram

69kV(66kV、63kV) 棒形悬式复合绝缘子主要尺寸与特性  
Main Dimensions and Characteristics of 69kV(66kV、63kV) Composite Long Rod Suspension Type Insulator

序号 Serial Number	绝缘子类型 Type of Insulator	额定电压 Specified Voltage	额定机械负荷 Specified Mechanical Tensile load	连接结构型式 Connection Structure Mark	绝缘长度 Section Length	最小爬电距离 Min. Arcing Distance	棒形直径 Big shed Diameter	最小公称爬电距离 Min Nominal Creepage Distance	雷电冲击耐受电压(峰值) Lightning Impulse Withstand Voltage(peak Value)	工频耐受电压(有效值) Power Frequency Withstand Voltage Min./Vol.(RMS)	参考重量 Reference Weight
		kV	kN		H mm	h mm	d1 mm	L mm	≈ kV	≈ kV	kg
1	FXBW-63/ (120/100/70)	63	120/100/70	16	840±20	643	177	1900	350	140	3.8
2	FXBW-69(66)/ (120/100/70)	66/69	120/100/70	16	940±15	700	177	2800	410	180	4.0

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按客户具体要求设计、生产  
Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.

36kV(35kV、33kV) 棒形悬式复合绝缘子 36kV(35kV、33kV) Composite Long Rod Suspension Type Insulator

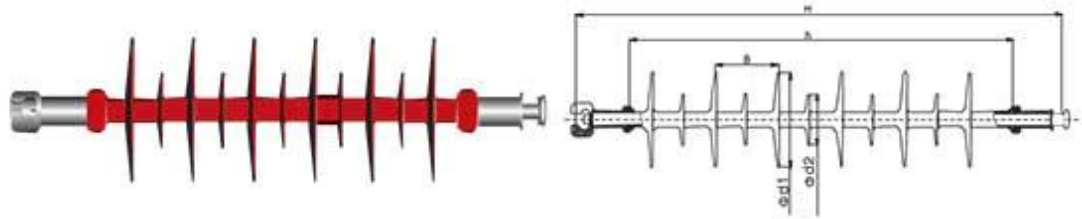

36kV(35kV、33kV) 棒形悬式复合绝缘子示意图  
36kV(35kV、33kV) Composite Long Rod Suspension Type Insulator Schematic Diagram

36kV(35kV、33kV) 棒形悬式复合绝缘子主要尺寸与特性  
Main Dimensions and Characteristics of 36kV(35kV、33kV) Composite Long Rod Suspension Type Insulator

Serial Number 序号	Type of Insulator 绝缘子型号	Specified Voltage 额定电压	Specified Mechanical Tensile load 额定机械负荷	Connection Structure Mark 连接结构代号	Section Length 绝缘子长度	Min. Arcing Distance 最小爬电距离	Big shed Diameter 大伞直径	Min nominal Creepage Distance 最小公称爬电距离	Lightning (Impulse Withstand Voltage/Peak Value) 雷电全波耐受电压峰值 (峰值)	Power Frequency Withstand Voltage (Min./Max./RMS) 工频1/全波耐受电压 (有效值)	Preference Weight 参考重量
		kV	kN		H mm	h mm	d1 mm	L mm	≥ kV	≥ kV	kg
1	FXBW-33(35)/ (120/100/80/70)	33/35	120/100/80/70	10	610 ± 15	450	144	810	230	95	26
2	FXBW-36/ (120/100/80/70)	36	120/100/80/70	15	690 ± 15	498	144	1440	230	95	28

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产  
Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.