


12kV-15kV 熔断器 12kV-15kV Cut-out Fuses

型号 Model	额定电压 Rated voltage (kV)	额定电流 Rated current (A)	最大额定峰值电流 Max. Rated Peaking current(kA)	工频耐受电压 Power frequency withstand voltage(dry) (kV.r.m.s) 1min	雷电冲击耐受电压 Lightning impulse withstand voltage (kVp)	爬距 Creepage distance (mm)	参考重量 Reference weight (kg)
HRW12-12(15)	12/15	100	8	50	110	440	3.6
	12/15	200	8	50	110	440	3.8



24kV-27kV 熔断器 24kV-27kV Cut-out Fuses


型号 Model	额定电压 Rated voltage (kV)	额定电流 Rated current (A)	最大额定峰值电流 Max. Rated Peaking current(kA)	工频耐受电压 Power frequency withstand voltage(dry) (kV.r.m.s) 1min	雷电冲击耐受电压 Lightning impulse withstand voltage (kVp)	爬距 Creepage distance (mm)	参考重量 Reference weight (kg)
RW12-24(27)	24/27	100	8	70	150	600	4.6
	24/27	200	8	70	150	600	4.6



说明：产品的尺寸、特性、连接方式和伞裙颜色等可根据客户具体要求设计、生产
 Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.


33kV-38kV 熔断器 33kV-38kV Cut-out Fuses

型号 Model	额定电压 Rated Voltage (kV)	额定电流 Rated Current (A)	最大额定峰值电流 Max. Rated Peaking Current(kA)	工频耐受电压 Power Frequency Withstand Voltage(4s) (kV,r.m.s) 1min	雷电冲击耐受电压 Lightning Impulse Withstand Voltage (kV)	爬距 Creepage Distance (mm)	参考重量 Reference Weight (kg)
HRW12-33(33/38)	33(33/38)	100	8	95	200	790	5.6
	33(33/38)	200	8	95	200	790	5.8

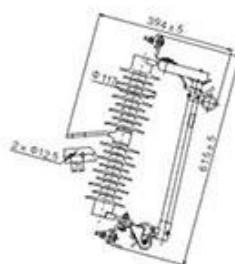

HRW5-40.5kV 跌落式熔断器 HRW5-40.5kV Cutout Fuse


型号 Model	额定电压 Rated Voltage (kV)	额定电流 Rated Current (A)	三相断流容量 (MVA) 3-Phase Breaking Capacity(MVA)		工频干耐受电压 (kV) P.F Dry Withstand Voltage(kV)	工频湿耐受电压 (kV) P.F Wet Withstand Voltage(kV)	熔断管上的导电部分允许温升 (°C) Allowed Temperature Rise Except Fuse Tube Live Parts(°C)
			上限 Up Limit	下限 Down Limit			
HRW5-40.5	40.5	100	400	10	105	185	60
	40.5	200	800	30	105	185	60

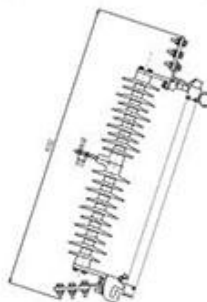

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产
Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.


HRW5-35kV 防风跌落式熔断器 HRW5-35kV Anti-Wind model Cut-out Fuse

型号 Model	额定电压 Rated Voltage (kV)	额定电流 Rated Current (A)	三相断流容量 (MVA) 3-Phase Breaking Capacity(MVA)		工频干耐受电压 (kV) P.F Dry Withstand Voltage(kV)	工频湿耐受电压 (kV) P.F Wet Withstand Voltage(kV)	除熔丝管上的导电部分允许温升 (°C) Allowed Temperature Rise Except Fuse Tube Live Parts(°C)
			上限 Up limit	下限 Down limit			
HRW5-35	35	100	400	10	105	185	60
	35	200	600	30	105	185	60

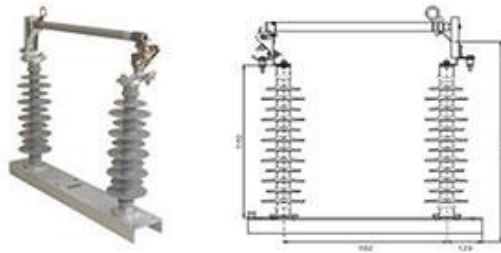

HRGW-66kV 防风V型跌落式熔断器 HRGW-66kV Anti-Wind Vtype Model Cut-Out Fuse

型号 Model	额定电压 (kV) Rated voltage (kV)	额定电流 (A) Rated current (A)	额定开断 电流 (kA) Specified Breaking Current (kA)	额定绝缘水平 Rated Insulation Level						永态静 拉力 (N) Forever Static Tension (N)
				额定雷电冲击耐受电压 (kV, 峰值) Rated lightning impulse Withstand Voltage (kV, peak)		1min工频耐受电压 (kV) 1min P.F. Withstand Voltage(kV)		1min工频湿耐受电压 (kV) 1min P.F. Wet Withstand Voltage(kV)		
				相对地 oppositely	断口 bruch	相对地 oppositely	断口 bruch	相对地 oppositely	断口 bruch	
HRGW	66	200	31.5	235	215	125	155	85	115	75

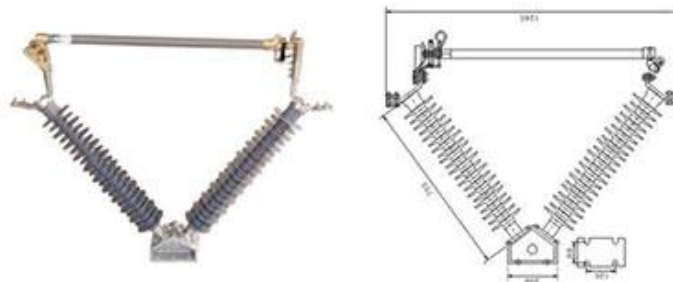

说明: 产品的尺寸、特性、连接方式和伞链颜色等可按客户要求设计、生产
Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.