


单绝缘棒形悬式复合绝缘子 Single Insulation Bar Composite Suspension Insulator

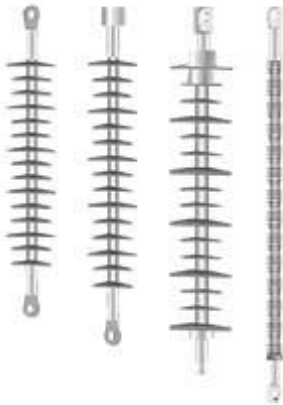

单绝缘棒形悬式复合绝缘子主要尺寸与特性

Main Dimension and Characteristics of Single Insulation Bar Composite Suspension Insulator

序号 Serial Number	产品型号 Product Type	额定电压 Specified Voltage	额定机械负荷 Specified Mechanical Loading (额定抗拉负荷/额定负荷) Specified Mechanical Loading	绝缘长度 Section Length	最小绝缘距离 Min Insulation Distance	最小公称爬电距离 Min nominal Creepage Distance	雷电冲击耐受电压 (峰值/峰值电压) Lightning Impulse Withstand Voltage/Peak Value	人工污秽工频耐受电压 (盐密 0.35mg/cm ² /kV) Artificial Pollution Power Frequency Withstand Voltage (Salt Deposit Density)	工频耐受电压 Power Frequency Withstand Voltage Test-Wet
		kV	kN	H mm	h mm	L mm	kV	kV	kV
1	FQX-25/(100/120)	25	100/120	700	≥500	1200	270	/	130
2	FQX-25/(160/200)	25	160/200	750	≥500	1200	270	/	130
3	FOXJ-25/(100/120)	25	100/120	750	≥550	1400	290	32	140
4	FQXJ-25/(160/200)	25	160/200	800	≥550	1400	290	32	140
5	FOXG-25/(100/120)	25	100/120	800	≥600	1600	310	36	150
6	FOXG-25/(160/200)	25	160/200	850	≥600	1600	310	36	150

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.