


单绝缘腕臂支撑复合绝缘子 Single Insulation Bracket Support Composite Insulator

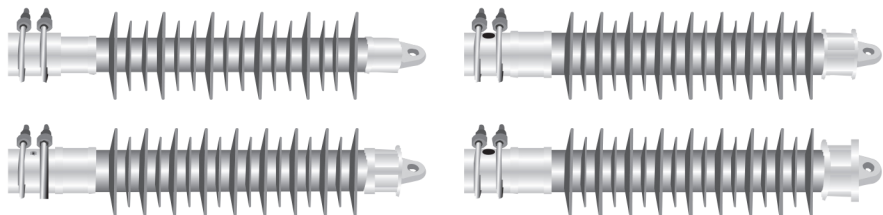

单绝缘腕臂支撑复合绝缘子主要尺寸与特性

Main Dimension and Characteristics of Single Insulation Bracket Support Composite Insulator

序号 Serial Number	产品类型 Product Type 产品型号	额定电压 Specified Voltage	额定机械负荷 Specified Mechanical Loading Load 额定机械强度 Specified Mechanical Strength	额定机械破坏力 Specified Mechanical Tensile Failure Load 额定机械破坏力 Specified Mechanical Tensile Failure Load	结构高度 Section Length	最小绝缘距离 Min Insulation Distance	最小爬电距离 Min nominal Creepage Distance	雷电全波冲击耐受电压 Lightning Impulse Withstand Voltage (Peak Value)	人工污秽工频耐受电压 Artificial Pollution Power Frequency Withstand Voltage (盐沉积密度) (盐标: 3mg/cm²)(kV)	工频耐受电压 Power Frequency/Withstand Voltage (1s)-Wat
		kV	kN	kN	H mm	h mm	L mm	kV	kV	kV
1	FQB-25/(8/12)	25	8/12	80/100	760	490	1200	270	/	130
2	FQB-25/(16/20)	25	16/20	120	800	490	1200	270	/	130
3	FQBJ-25/(8/12)	25	8/12	80/100	760	490	1400	290	32	140
4	FQBJ-25/(16/20)	25	16/20	120	800	490	1400	290	32	140
5	FQBG-25 (8/12)	25	8/12	80/100	800	520	1600	310	36	150
6	FQBG-25 (16/20)	25	16/20	120	800	520	1600	310	36	150

说明: 产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.