


双绝缘腕臂支撑复合绝缘子 Double Insulation Bracket Support Composite Insulator

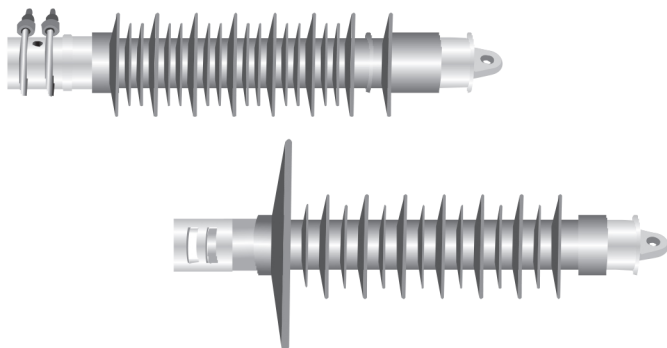

双绝缘腕臂支撑复合绝缘子主要尺寸与特性

Main Dimension and Characteristics of Double Insulation Bracket Support Composite Insulator

Serial Number 序号	Product Type 产品型号	Specified Voltage 额定电压	Specified Mechanical Bending Load 额定弯矩/弯曲负荷	Specified Mechanical Tensile/Falling Load 额定/坠砣负荷/破断力	Section Length 绝缘长度	Min Insulation Distance 最小绝缘距离	Min nominal (Creepage Distance 最小公称爬电距离	Lightning Impulse Withstand Voltage(Peak Value) 雷电冲击耐受电压峰值	Artificial Pollution Power Frequency Withstand Voltage (Salt Deposit Density) (盐密/等值盐密)	Power/Frequency Withstand Voltage Test-Wet 工频耐电压
		kV	kN	kN	H mm	h mm	L mm	kV	kV	kV
1	FQBS-25/(8/12)	25	8/12	80/100	850	490	1200/145	270	/	130
2	FQBS-25/(16/20)	25	16/20	120	890	490	1200/145	270	/	130
3	FOBSJ-25/(8/12)	25	8/12	80/100	850	490	1400/145	290	32	140
4	FOBSJ-25/(16/20)	25	16/20	120	890	490	1400/145	290	32	140
5	FQBSG-25 (8/12)	25	8/12	80/100	890	520	1600/145	310	36	150
6	FQBSG-25/(16/20)	25	16/20	120	890	520	1600/145	310	36	150
7	FOBGNH-25/(16/20)	25	16/20	120/140	800	520/500	1600/145	310	38	150

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.